


PLAN VIEW

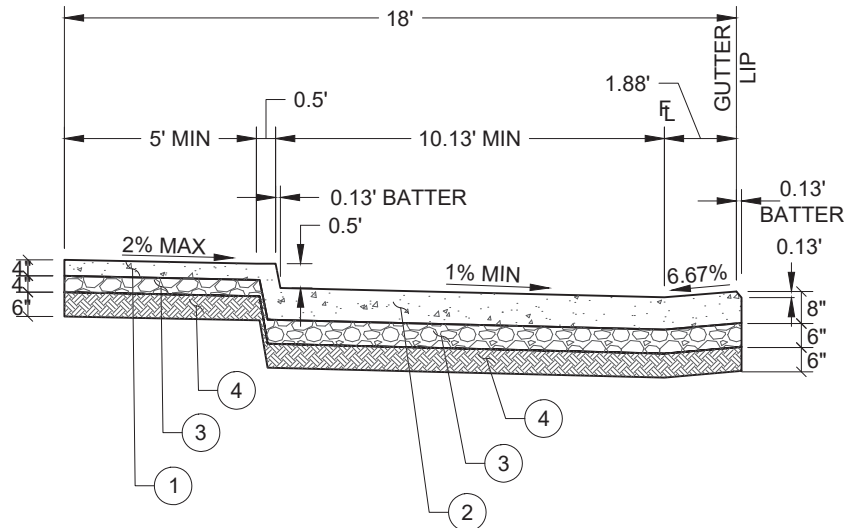

SECTION A-A

①	4,000 PSI MIN CONCRETE
②	8" OF 4,000 PSI MIN CONCRETE WITH #4 REBAR SPACED AT 18" O.C. EACH DIRECTION
③	CLASS II AB PROCESSED TO 95% RELATIVE COMPACTION (4" THICK UNDER SIDEWALK & 6" MIN UNDER CURB AND BUS TURNOUT PAD) OR PER PROJECT PLANS.
④	6" MIN OF SUB-GRADE OR CLASS II AB PROCESSED TO 95% RELATIVE COMPACTION, OR PER PROJECT PLANS.
⑤	BUS SHELTER PAD AND WHEELCHAIR & BICYCLE PARKING PAD PER STD DETAIL #262A. IF NO BUS SHELTER IS REQUIRED, INSTALL A 16-3" WIDE BY 9' DEEP WHEELCHAIR & BICYCLE PARKING PAD STARTING AT THE TRANSITION.

THE CITY OF WEST SACRAMENTO - STANDARD DETAIL



APPROVED: Aug. X, 2025

STANDARD
DETAIL #

261

TITLE:

**STANDARD
BUS TURNOUT**

